


Opera

Radiant Convectors

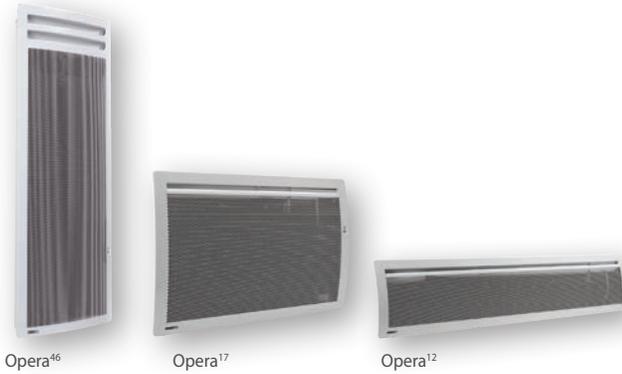

Opera⁴⁶

Opera¹⁷

Opera¹²



Features

Color

- Standard: satin white.

Finish

- Standard: epoxy/polyester anti-rust powder coating resistant to UV rays.

Voltage

- 240/208V, 60 Hz, 1-phase.

Construction

- Convex casing with rounded corners.
- Perforated front panel for better radiant heat diffusion with absence detector.
- High-limit temperature control with automatic reset.

Heating element

- Ribbed monoblock element made of high-emissivity aluminum alloy. **1**

Control

- Programmable built-in electronic proportional-action digital thermostat, ultra-precise to 1/10 °C (1/5 °F), located at the top of the unit. **2**
- LCD backlit display with digital controls lockable by key combination and the ability to add a code for unlocking.
- Temperature display format (°C or °F).
- "On-Off" button.
- "Manual" button to choose from Comfort, Economy and Frost Protection modes.
- "Open-window" button to activate the open-window detection function.
- "Automatic" button.
- Energy use indicator.
- Heating indicator light.
- Absence detector (setback when absence is detected, and this function is activated). **3**

Installation

- Quick surface-mounted installation, with the included wall mounting bracket, that also serves as marking template.
- Flexible cable with electrical wall box cover plate included.
- Requires installation of a wall electrical box not supplied.

Warranty

- 2-year warranty against defects.
- 5-year warranty on the heating element.

Application


- Kitchen, living room, family room, bedroom, bay window.

Opera radiant convectors offer a stunning blend of aesthetics, technology, and energy efficiency. To significantly save on energy, choose from one of the preset programs, customize your own, or let the absence detector take care of lowering the temperature for you!


The open-window detection feature also avoids wasting energy by stopping the heater when a sudden influx of cold air is detected.




Recommended installation height		Minimum clearances							
		Front		Sides		Above		Below	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
6	152	30	762	6	152	8	203	1	25

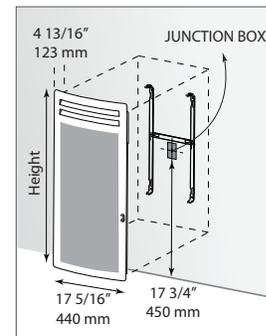

Opéra⁴⁶

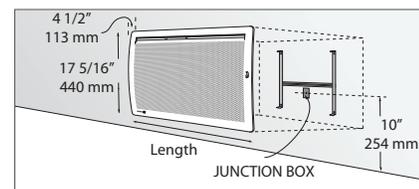

Opéra¹⁷

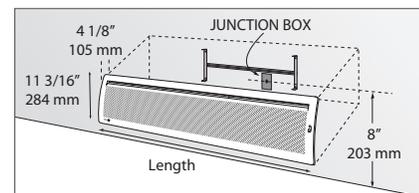

Opéra¹²

Note: The depth shown includes wall bracket.

Models

Product #	Price	Volts	Watts	Height		Length		Weight	
				in.	mm	in.	mm	lb	kg
Opera¹²									
7735-C07-FS	626.00	240/208	750/565	11 3/16	284	35 3/16	893	12.1	5.5
7735-C10-FS	666.00	240/208	1000/750	11 3/16	284	41 3/4	1060	13.4	6.1
Opera¹⁷									
7736-C05-FS	504.00	240/208	500/375	17 5/16	440	20 15/16	532	9.7	4.4
7736-C10-FS	556.00	240/208	1000/750	17 5/16	440	25 1/16	637	11.7	5.3
7736-C15-FS	633.00	240/208	1500/1125	17 5/16	440	33 3/8	847	15.4	7.0
7736-C20-FS	666.00	240/208	2000/1500	17 5/16	440	41 5/8	1057	19.2	8.6
Opera¹⁶									
7737-C10-FS	589.00	240/208	1000/750	33 3/8	847	17 5/16	440	15.4	7.0
7737-C15-FS	666.00	240/208	1500/1125	41 5/16	1050	17 5/16	440	17.6	8.7
7737-C20-FS	710.00	240/208	2000/1500	45 11/16	1160	17 5/16	440	19.8	9.5

